


Dialogic® JCT Media Boards

Dialogic® JCT Media Boards can be used by developers to provide cost-effective, scalable, high-density communications applications. The applications include those requiring digital network interfaces as well as multimedia resources, such as voice and software-based speech recognition or fax in a single Personal Computer (PC) slot. These boards offer a rich set of advanced features and support Digital Signal Processor (DSP) technology, Continuous Speech Processing (CSP), and industry-standard PCI or PCI Express bus, and CT Bus technologies.

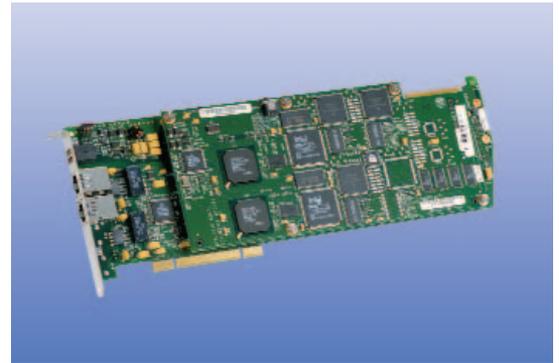

Products Discussed in This Datasheet

- Dialogic® D/480JCT-1T1 Media Board
- Dialogic® D/480JCT-2T1 Media Board
- Dialogic® D/600JCT-1E1 Media Board
- Dialogic® D/600JCT-2E1 Media Board

CSP technology — the DSP-based solution optimized for speech recognition — enables a friendly user interface and seamless integration of speech recognition software from leading speech technology vendors. CSP reduces system latency, increases recognition accuracy, and improves overall system response time for high-density speech solutions.

Onboard DSP-based fax and support for software-based speech recognition lets developers maximize the number of boards in the system for multimedia communications applications, such as web-enabled call centers, voice portals, unified messaging, or speech-enabled Interactive Voice Response (IVR). The option to use voice coders, such as Global System for Mobile Communications (GSM) and G.726, provides the capability to build unified messaging solutions while extending existing legacy messaging systems. In addition, Dialogic® Global Call Software facilitates global deployment to meet the growing needs of your business.

Features	Benefits
48 to 60 independent voice channels, and 24 to 48 T1 or 30 to 60 E1 network channels in a single PCI or PCI Express slot	Lower costs while creating larger high-density systems with fewer boards per chassis
Supports G.726 bit exact and GSM coders	Enables implementation of unified messaging applications that meet VPIM standards
Silence-compressed recording	Eliminates silence and preserves hard disk space
Unified call control access through Dialogic® Global Call Software interface	Provides worldwide application portability and shortens development time by using the same API for almost any network protocol
Separate models available with Universal PCI or PCI Express edge connector	Universal PCI form factor compatible with 3.3 V and 5.0 V bus signals enabling deployment in a wide variety of PCI chassis from popular manufacturers; PCI Express form factor compatible with 1x slot (x1 or higher compatible) also available
Supports DSP-based onboard fax and host-based speech recognition on select boards (fax and host-based speech recognition are mutually exclusive)	Maximizes the number of boards in the system

Technical Specifications

D/480JCT-1T1 and D/480JCT-2T1

Number of ports	48
Maximum boards per system	10. Number may be limited by application, system performance, and the number of CT Bus loads per board
CT Bus loads per board	Approximately 4
Maximum CT Bus loads per system	20
Digital network interface	Onboard DSX-1 interface
Resource sharing bus	H.100 CT Bus
Control microprocessors	4 Intel486 GX processors
Digital signal processor	Freescale DSP56303 @ 100 MHz, with 128Kx24 private
Supported operating systems	Windows®; Linux. Details at http://www.dialogic.com/systemreleases
CSP	Yes
Signaling	Digital ISDN PRI (CAS)

Host Interface — PCI

Bus compatibility	PCI. Complies with PCISIG Bus Specification, Rev. 2.2
Bus speed	33 MHz maximum
Bus mode	32- to 16-bit conversion in target mode
Shared memory	4 × 64 KB page
I/O ports	None
Support	3.3 V or 5 V signaling environment (universal connectivity)

Platform — PCI

Form factor	PCI long card 12.3 in. (31.24 cm) long (without edge retainer) or 13.3 in. (33.78 cm) long (with edge retainer) 0.79 in. (2 cm) wide (total envelope) 3.87 in. (9.83 cm) high (excluding edge connector)
-------------	---

Power Requirements — PCI

+5 VDC	3.36 A typical; 4.03 A maximum
+12 VDC	7.3 mA typical; 8.0 mA maximum
-12 VDC	Not required

Host Interface — PCI Express

Bus compatibility	Complies with PCI-SIG PCI Express Base Specification, Rev. 1.1
Bus speed	2.5 GHz maximum per direction
Bus mode	x1 lane configuration (x1 or higher compatible)
Shared memory	32 KB to 64 KB page
Interrupt level	Message Signaled Interrupt (MSI)
I/O ports	None

Platform — PCI Express

Form factor	PCI Express x1 lane configuration (or higher) 12.3 in. (31.24 cm) long (without edge retainer) or 13.3 in. (33.78 cm) long (with edge retainer) 0.79 in. (2 cm) wide (total envelope) 3.87 in. (9.83 cm) high (excluding edge connector)
-------------	---

Power Requirements — PCI Express

+3.3 VDC	1.12 A typical, 1.4 A maximum
+12 VDC	800 mA typical, 900 mA maximum

Technical Specifications (cont.)

Environmental Requirements — PCI and PCI Express

Operating temperature	+32°F (0°C) to +122°F (+50°C)
Storage temperature	-4°F (-20°C) to 158°F (+70°C)
Humidity	8% to 80% noncondensing

Telephone Interface

Clock rate	1.544 Mb/s ±32 ppm
Level	3.0 V (nominal)
Pulse width	323.85 ns (nominal)
Line impedance	100 Ohm ±10%
Other electrical characteristics	Complies with AT&T TR62411 and ANSI T1.403-1989
Framing	SF (D3/D4) ESF for ISDN
Line coding	AMI AMI with B7 stuffing B8ZS
Clock and data recovery	Complies with AT&T TR62411 and Telcordia TA-TSY-000170
Jitter tolerance	Complies with AT&T TR62411 and ANSI T1.403-1989
Connectors	RJ-48C
Telephony bus connector	H.100-style 68-pin fine pitch card edge connector
Loopback	Supports switch-selectable local analog loopback and software-selectable local digital loopback

Approvals and Compliance

Hazardous substances	RoHS Compliance Information at http://www.dialogic.com/rohs
<i>Safety and EMC</i>	
Canada	ICES-003 Class A ULc CSA 60950-1 File E96804
Japan	VCCI Class A
United States	FCC Part 15 Class A UL 60950-1 File E96804
<i>Telecom Approvals</i>	
Canada	IC: 885 5959 A
Japan	D/480JCT-1T1: C00-0879JP/L00-0238
United States	US:EBZUSA-20078-XD-N
Country-specific approvals	See the Product Declarations & Global Approvals list at http://www.dialogic.com/declarations/ or contact your Authorized Distributor

Reliability/Warranty

Estimated MTBF	Per Telcordia Method PCI: 154,000 hours PCI Express: 154,000 hours
Warranty	Warranty information at http://www.dialogic.com/warranties

Technical Specifications (cont.)

D/600JCT-1E1 and D/600JCT-2E1

Number of ports	60
Maximum boards per system	10. Number may be limited by application, system performance, and the number of CT Bus loads per board
CT Bus loads per board	Approximately 4
Maximum CT Bus loads per system	20
Digital network interface	Onboard E-1 interface
Resource sharing bus	H.100 CT Bus
Control microprocessors	4 Intel486 GX processors
Digital signal processor	Freescale DSP56303 @ 100 MHz, with 128Kx24 private
Supported operating systems	Windows®; Linux. Details at http://www.dialogic.com/systemreleases
CSP	One E1 span only
Signaling	R2MF

Host Interface — PCI

Bus compatibility	PCI. Complies with PCISIG Bus Specification, Rev. 2.2
Bus speed	33 MHz maximum
Bus mode	32- to 16-bit conversion in target mode
Shared memory	4 x 64 KB page
I/O ports	None
Support	3.3 V or 5 V signaling environment (universal connectivity)

Platform — PCI

Form factor	PCI long card 12.3 in. (31.24 cm) long (without edge retainer) or 13.3 in. (33.78 cm) long (with edge retainer) 0.79 in. (2 cm) wide (total envelope) 3.87 in. (9.83 cm) high (excluding edge connector)
-------------	---

Power Requirements — PCI

+5 VDC	3.7 A typical; 4.3 A maximum
+12 VDC	7.4 mA typical; 8.8 mA maximum
-12 VDC	Not required

Environmental Requirements — PCI

Operating temperature	+32°F (0°C) to +122°F (+50°C)
Storage temperature	-4°F (-20°C) to 158°F (+70°C)
Humidity	8% to 80% noncondensing

Host Interface — PCI Express

Bus compatibility	Complies with PCI-SIG PCI Express Base Specification, Rev. 1.1
Bus speed	2.5 GHz maximum per direction
Bus mode	x1 lane configuration (x1 or higher compatible)
Shared memory	32 KB to 64 KB page
Interrupt level	Message Signaled Interrupt (MSI)
I/O ports	None

Platform — PCI Express

Form factor	PCI Express x1 lane configuration (or higher) 12.3 in. (31.24 cm) long (without edge retainer) or 13.3 in. (33.78 cm) long (with edge retainer) 0.79 in. (2 cm) wide (total envelope) 3.87 in. (9.83 cm) high (excluding edge connector)
-------------	---

Technical Specifications (cont.)

Power Requirements — PCI Express

+3.3 VDC	1.12 A typical, 1.4 A maximum
+12 VDC	800 mA typical, 900 mA maximum

Environmental Requirements — PCI Express

Operating temperature	+32°F (0°C) to +122°F (+50°C)
Storage temperature	-4°F (-20°C) to 158°F (+70°C)
Humidity	8% to 80% noncondensing

Telephone Interface

Network clock rate	2.048 Mb/s ±50 ppm
Internal clock rate	2.048 Mb/s ±32 ppm
Level	2.37 V (nominal) for 75 Ohm lines 3.0 V (nominal) for 120 Ohm lines
Pulse width	244 ns (nominal)
Line impedance	75 Ohm, unbalanced 120 Ohm, balanced
Other electrical characteristics	Complies with ITU-T Rec. G.703
Framing	ITU-T G.704-1988 with CRC4
Line coding	HDB3
Clock and data recovery	Complies with ITU-T Rec. G.823-1988
Jitter tolerance	Complies with ITU-T Rec. G.823, G.737, G.739, G.742-1988
Connectors	BNC for 75 Ohm lines RJ-48C for 120 Ohm lines
Telephony bus connector	H.100-style 68-pin fine pitch card edge connector
Loopback	Supports switch-selectable local analog loopback and software-selectable local digital loopback

Approvals and Compliance

Hazardous substances	RoHS Compliance Information at http://www.dialogic.com/rohs
<i>Safety and EMC</i>	
Europe	EN60950 EN55022 EN55024
International	IEC60950-1 CISPR 22 CISPR 24
<i>Telecom Approvals</i>	
Country-specific approvals	See the Product Declarations & Global Approvals list at http://www.dialogic.com/declarations/ or contact your Authorized Distributor

Reliability/Warranty

Estimated MTBF	Per Telecordia Method 1 PCI: 154,000 hours PCI Express: 154,000 hours
Warranty	Warranty information at http://www.dialogic.com/warranties

Springware/JCT Technical Specifications

Facsimile

Fax compatibility	ITU-T G3 compliant (T.4, T.30) ETSI NET/30 compliant
Data rate	14,400 b/s (v.17) send 9600 b/s receive
Variable speed selection	Automatic step-down to 12,000 b/s, 9600 b/s, 7200 b/s, 4800 b/s, and lower
Transmit data modes	Modified Huffman (MH) Modified Read (MR)
Receive data modes	MH, MR
File data formats	Tagged Image File Format-Fax (TIFF-F) for transmit/receive MH and MR
ASCII-to-fax conversion	Host-PC-based conversion Direct transmission of text files All Windows® fonts supported Page headers generated automatically
Error correction	Detection, reporting, and correction of faulty scan lines
Image widths	8.5 in. (21.6 cm) 10 in. (25.4 cm) 11.9 in. (30.23 cm)
Image scaling	Automatic horizontal and vertical scaling between page sizes
Polling modes	Normal Turnaround
Image resolution	Normal (203 pels/in. × 98 lines/in., 203 pels/2.5 cm × 98 lines/2.5 cm) Fine (203 pels/in. × 196 lines/in., 203 pels/2.5 cm × 196 lines/2.5 cm)
Fill minimization	Automatic fill bit insertion and stripping

Audio Signal

Receive range	(T-1) -40 dBm0 to +2.5 dBm0 nominal, configurable by parameter** (E-1) -43 dBm0 to +2.5 dBm0 nominal, configurable by parameter**
Automatic gain control	Application can enable/disable Above -18 dBm0 (T-1) or -21 dBm0 (E-1) results in full-scale recording, configurable by parameter**
Silence detection	-38 dBm0 nominal, software adjustable**
Transmit level (weighted average)	(T-1) -9 dBm0 nominal, configurable by parameter** (E-1) -12.5 dBm0 nominal, configurable by parameter**
Transmit volume control	40 dB adjustment range, with application-definable increments and legal limit cap

Frequency Response

24 kb/s	300 Hz to 2600 Hz ±3 dB
32 kb/s	300 Hz to 3400 Hz ±3 dB
48 kb/s	300 Hz to 2600 Hz ±3 dB
64 kb/s	300 Hz to 3400 Hz ±3 dB

Springware/JCT Technical Specifications (cont.)

Audio Digitizing

13 kb/s	GSM @ 8 kHz sampling
24 kb/s	OKI ADPCM @ 6 kHz sampling
32 kb/s	OKI ADPCM @ 8 kHz sampling
32 kb/s	G.726 @ 8 kHz sampling
48 kb/s	A-law G.711 PCM @ 6 kHz sampling
48 kb/s	μ-law G.711 PCM @ 6 kHz sampling
64 kb/s	A-law G.711 PCM @ 8 kHz sampling
64 kb/s	μ-law G.711 PCM @ 8 kHz sampling
Digitization selection	Selectable by application on function call-by-call basis
Playback speed control	Pitch controlled Available on OKI ADPCM and G.711 PCM Adjustment range: ±50% Adjustable through application or programmable DTMF control

DTMF Tone Detection

DTMF digits	0 to 9, *, #, A, B, C, D per ITU-T Q.23
Dynamic range	–36 dBm0 to –3 dBm0 (T-1) or –39 dBm0 to 0 dBm0 (E-1) per tone, configurable by parameter**
Minimum tone duration	40 ms, can be increased with software configuration
Interdigit timing	Detects like digits with a >40 ms interdigit delay Detects different digits with a 0 ms interdigit delay
Acceptable twist and frequency variation	(T-1) Meets Telcordia LSSGR Sec 6 and EIA 464 requirements (E-1) Meets appropriate ITU-T specifications**
Noise tolerance	Meets Telcordia LSSGR Sec 6 and EIA 464 requirements for Gaussian, impulse, and power line noise tolerance
Cut-through	(T-1) Local echo cancellation permits 100% detection with a >4.5 dB return loss line (E-1) Digital trunks use separate transmit and receive paths to network Performance dependent on far-end handset's match to local analog loop
Talk-off	Detects less than 20 digits while monitoring Telcordia TR-TSY-000763 standard speech tapes (LSSGR requirements specify detecting no more than 470 total digits) Detects 0 digits while monitoring MITEL speech tape #CM 7291

Global Tone Detection

Tone type	Programmable for single or dual
Maximum number of tones	Application-dependent
Frequency range	Programmable within 300 Hz to 3500 Hz
Maximum frequency deviation	Programmable in 5 Hz increments
Frequency resolution	±5 Hz. Separation of dual frequency tones is limited to 62.5 Hz at a signal-to-noise ratio of 20 dB.
Timing	Programmable cadence qualifier, in 10 ms increments
Dynamic range	(T-1) Programmable, default set at –36 dBm0 to –0 dBm0 (single tone), –3 dBm0 (dual tone) (E-1) Programmable, default set at –39 dBm0 to +0 dBm0 per tone

Global Tone Generation

Tone type	Generate single or dual tones
Frequency range	Programmable within 200 Hz to 4000 Hz
Frequency resolution	1 Hz
Duration	10 ms increments
Amplitude	(T-1) –43 dBm0 to –3 dBm0 per tone nominal, programmable (E-1) –40 dBm0 to +0 dBm0 per tone nominal, programmable

Springware/JCT Technical Specifications (cont.)

MF Signaling (T-1)

MF digits
 Transmit level
 Signaling mechanism
 Dynamic range for detection
 Acceptable twist
 Acceptable frequency variation

R1

0 to 9, KP, ST, ST1, ST2, ST3 per Telcordia LSSGR Sec 6, TR-NWT-000506 and ITU-T Q.321
 Complies with Telcordia LSSGR Sec 6, TR-NWT-000506
 Complies with Telcordia LSSGR Sec 6, TR-NWT-000506
 -25 dBm0 to -3 dBm0 per tone
 6 dB
 Less than ±1 Hz

MF Signaling (E-1)

MF digits
 Transmit level
 Signaling mechanism
 Dynamic range for detection
 Acceptable twist
 Acceptable frequency variation

R2

All 15 forward and backward signal tones per ITU-T Q.441
 -8 dBm0 per tone, nominal, per ITU-T Q.454; programmable
 Supports the R2 compelled signaling cycle and non-compelled pulse requirements per ITU-T Q.457 and Q.442
 -35 dBm0 to -5 dBm0 per tone
 6 dB
 Less than ±1 Hz

Call Progress Analysis

Busy tone detection
 Ring back detection
 Positive voice detection
 Positive voice detection speed
 Positive answering machine detection
 Fax/modem detection
 Intercept detection
 Dial tone detection

Default setting designed to detect 74 out of 76 unique busy/congestion tones used in 97 countries as specified by ITU-T Rec. E., Suppl. #2
 Default uses both frequency and cadence detection
 Application can select frequency only for faster detection in specific environments
 Default setting designed to detect 83 out of 87 unique ring back tones used in 96 countries as specified by ITU-T Rec. E., Suppl. #2
 Uses both frequency and cadence detection
 Standard
 Detects voice in as little as 1/10th of a second
 Standard
 Preprogrammed
 Detects entire sequence of the North American tri-tone
 Other intercept tone sequences can be programmed
 Application enable/disable
 Supports up to three different user-definable before dialing dial tones
 Programmable dial tone dropout debouncing

Tone Dialing

DTMF digits
 Frequency variation
 Rate
 Level

0 to 9, *, #, A, B, C, D per Telcordia LSSGR Sec 6, TR-NWT-000506
 Less than ±1 Hz
 10 digits/s, configurable by parameter**
 -7.5 dBm0 per tone, nominal, configurable by parameter**

Pulse Dialing

10 digits
 Pulsing rate
 Break ratio

0 to 9
 10 pulses/s, nominal, configurable by parameter**
 60% nominal, configurable by parameter**

Analog Display Services Interface (ADSI)

FSK generation per Telcordia TR-NWT-000030
 CAS tone generation and DTMF detection per Telcordia TR-NWT-001273

Additional Components

- Multidrop CT Bus cables
 - CBLCTB68C3DROP
 - CBLCTB68C4DROP
 - CBLCTB68C8DROP
 - CBLCTB68C12DROP
 - CBLCTB68C16DROP

Ordering Information

Product Code	Order Code	Description
D480JCT2T1W	881-772	48-port Digital T1, PCI
D480JCT1T1W	881-771	48-port Digital T1, PCI
D600JCT2E1120W	881-778	60-port Digital E1, PCI
D600JCT2E175W	881-779	60-port Digital E1, PCI
D600JCT1E1120W	881-776	60-port Digital E1, PCI
D600JCT1E175W	881-777	60-port Digital E1, PCI
D480JCT2T1EW	884-589	48-port Digital T1, PCIe
D480JCTT1EW	884-588	24-port Digital T1, PCIe
D600JCT2E1120EW	884-592	60-port Digital E1, PCIe
D600JCT2E175EW	884-593	60-port Digital E1, PCIe
D600JCTE1120EW	884-590	30-port Digital E1, PCIe
D600JCTE175EW	884-591	30-port Digital E1, PCIe

To learn more, visit our site on the World Wide Web at <http://www.dialogic.com>.

Dialogic Corporation
9800 Cavendish Blvd., 5th floor
Montreal, Quebec
CANADA H4M 2V9

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH PRODUCTS OF DIALOGIC CORPORATION ("DIALOGIC"). NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN A SIGNED AGREEMENT BETWEEN YOU AND DIALOGIC, DIALOGIC ASSUMES NO LIABILITY WHATSOEVER, AND DIALOGIC DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF DIALOGIC® PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT OF A THIRD PARTY.

Dialogic products are not intended for use in medical, life saving, life sustaining, critical control or safety systems, or in nuclear facility applications.

Dialogic may make changes to specifications, product descriptions, and plans at any time, without notice.

Dialogic is a registered trademark of Dialogic Corporation. Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department located at the address given above. Any authorized use of Dialogic's trademarks will be subject to full respect of the trademark guidelines published by Dialogic from time to time and any use of Dialogic's trademarks requires proper acknowledgement.

Windows is a registered trademark of the Microsoft Corporation in the United States and/or other countries. Other names of actual companies and products mentioned herein are the trademarks of their respective owners. Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country.

None of the information provided in this datasheet other than what is listed under the section entitled Technical Specifications forms part of the specifications of the product and any benefits specified are not guaranteed.

Positive Answering Machine Detection/Positive Voice Detection

These performance results were measured using specific computer systems and/or components within specific lab environments and under specific system configurations. Any difference in system hardware, software design, or configuration may affect actual performance. The results are furnished for informational use only and should not be construed as a commitment by Dialogic. Dialogic assumes no responsibility or liability for any errors or inaccuracies.

Outbound Dialing/Telemarketing

Outbound dialing systems may be subject to certain laws or regulations. Dialogic makes no representation that Dialogic products will satisfy the requirements of any such laws or regulations (including, without limitation, any regulations dealing with telemarketing).

**Configurable to meet country-specific PTT requirements. Actual specification may vary from country to country for approved products.